

Cable holders, UZP type

FEATURES & BENEFITS



popular holders for flush-mounted electric systems




particularly useful for brick and aerated concrete walls

MECHANICAL DATA

Material	copolymer PE + PP
Operating temperature [°C]	-30 ÷ +70
Colour	white
Mounting hole d [mm]	7

NOTE!

Mounting hole diameter, depending on the substrate type, must be adjusted to the fixture.

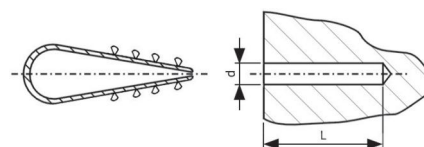

Type	Cable external diameter [mm]	Mounting hole L [mm]	Quantity in package [pcs]
UZP 1	max. 6	40	100
UZP 2	6 ÷ 10	50	50