


## FEATURES & BENEFITS

- reliable fastening of bundle to enclosure, e.g. with cable tie
- wide range of solutions for various ambient conditions and floor types

## LOGISTIC DATA


Quantity in package [pcs] 100

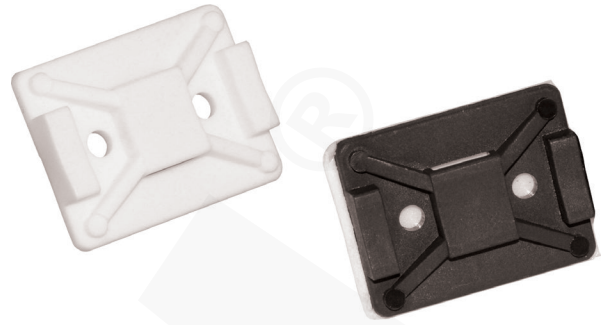

Fasteners E8RA type are made of material that meets the requirements of the railway standard PN-EN 45545-2:2013+A1:2015 in the field of smoke and toxic substances generation, the E8HT elements are intended for operation at high temperatures.

## MECHANICAL DATA

**Material** polyamide 6  
**Halogen-free** yes  
**Max. tape width [mm]** 8



## CERTIFICATES & STANDARDS

**Flammability class** UL 94 V2 (white); UL 94 V0 (black);

## NOTE!

Static load approximated for 20 °C. For minimal and maximum temperatures, the load will be lower. For "S" version, V0 flammability data does not apply to self-adhesive tapes.

Type	Index Ergom	Installation	Colour	Operating temperature [°C]	Max. static load [g]	Application in buildings
<b>E8 (100 PCS)</b>	E01EM-01020100100	by screwing	white	-40 ÷ +80		indoors and outdoors
<b>E8S (100 PCS)</b>	E01EM-01020100300	self-adhesive fastening	white	-30 ÷ +60	220	indoors
<b>E8V0 (100 PCS)</b>	E01EM-01020100200	by screwing	black	-40 ÷ +80		indoors and outdoors
<b>E8S V0 (100 PCS)</b>	E01EM-01020100400	self-adhesive fastening	black	-30 ÷ +60	220	indoors
<b>E8RA (100 PCS)</b>	E01EM-01020100500	by screwing	black	-30 ÷ +100		
<b>E8HT (100 PCS)</b>	E01EM-01020100600	by screwing	white	-40 ÷ +120		

