

## FEATURES & BENEFITS



heat-shrink caps for cable terminal protection



hot melt adhesive ensures very good insulation tightness in humid environments

## LOGISTIC DATA

Quantity in package [pcs] 10


Used to seal and protect cable terminations. Internally coated with hot melt glue. Start shrink wrapping from the blind end.

## MECHANICAL DATA

Material	cross linked polyolefin with hot melt adhesive
Halogen-free	yes
UV Resistance	yes
Recommended shrinking temperature [°C]	120 ÷ 200
Operating temperature [°C]	-40 ÷ +100
Shrinkage factor	2:1 do 3:1
Colour	black

## ELECTRICAL DATA

Breakdown strength [kV/mm] 12

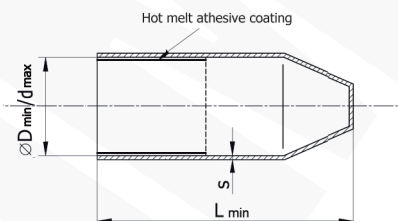

Type	Index Ergom	Length in delivery L [mm]	Inside diameter on delivery D [mm]	Inside diameter in full shrinkage d [mm]	Wall thickness on full shrinkage - s [mm]
TZK 10/4 (10 PCS)	E05ME-01050100103	58	12	4,0	2,3
TZK 14/4 (10 PCS)	E05ME-01050100203	58	14	4,0	2,3
TZK 16/8 (10 PCS)	E05ME-01050100303	75	16	8,0	2,9
TZK 18/6 (10 PCS)	E05ME-01050100403	20	18	6,0	2,1
TZK 21/6 (10 PCS)	E05ME-01050100503	20	21	6,0	2,1
TZK 23/8 (10 PCS)	E05ME-01050100603	75	25	8,0	2,5
TZK 33/15 (10 PCS)	E05ME-01050100703	75	35	11,0	2,5
TZK 40/15 (10 PCS)	E05ME-01050100803	90	40	14,6	3,5
TZK 52/25 (10 PCS)	E05ME-01050100903	125	55	25,0	3,5
TZK 63/25 (10 PCS)	E05ME-01050100953	125	63	25,0	3,8
TZK 70/25 (10 PCS)	E05ME-01050101003	115	70	24,2	3,5
TZK 75/35 (10 PCS)	E05ME-01050101023	140	75	35,0	4,0
TZK 90/45 (10 PCS)	E05ME-01050101103	160	100	45,0	4,0
TZK 120/45 (10 PCS)	E05ME-01050101203	200	120	45,0	4,0
TZK 120/60 (10 PCS)	E05ME-01050101223	160	130	60,0	4,6