

## FEATURES & BENEFITS



protective pipe connectors, G thread



for piping with very large diameters, up to 100 mm

## LOGISTIC DATA

Quantity in package [pcs] 1

## MECHANICAL DATA

**Material** body: zinc alloy; insert: galvanized steel; nut: galvanized steel (ST) or a zinc alloy (ZN); seal: rubber



**Operating temperature [°C]** -30 ÷ +80

## CERTIFICATES & STANDARDS

**IP degree of protection** IP66

## NOTE!

Set with lock nut and sealing washer.

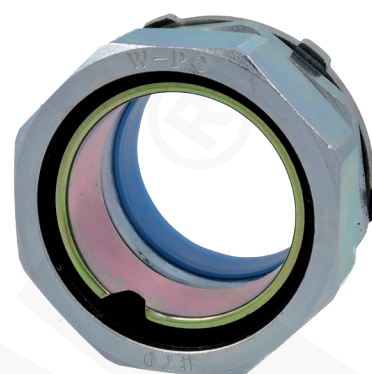

Type	Index Ergom	For spanner A	For spanner B	L	C	E	D <sub>1</sub>	D <sub>2</sub>	S	G thread	Tube type
MWE G2 1/2"/63	E03DK-08010300101	88	86	40	60	22	94	88	4,5 (ST)	G 2 1/2"	WO 63, WOT 63
MWE G3"/75	E03DK-08010300201	106	102	44	74	23	106	101	4,5 (ST)	G 3"	WO 75, WOT 75
MWE G4"/100	E03DK-08010300301	133	130	50	96	28	134	128	10 (ZN)	G 4"	WO 100, WOT 100

