

## FEATURES & BENEFITS



cable ties for applications with recommended black colour of components



for indoor used, with enhanced UV-resistance in relation to TK ties

## MECHANICAL DATA


Material	polyamide 6.6
Halogen-free	yes
Colour	black
Operating temperature [°C]	-40 ÷ +85
Short-term temperature [°C]	+110
Assembly temperature [°C]	0 ÷ +60

## CERTIFICATES & STANDARDS

Flammability class	UL 94 V2
Standards	EN 62275

## NOTE!

UL certificate - for up-to-date information, visit [www.ergom.com](http://www.ergom.com)

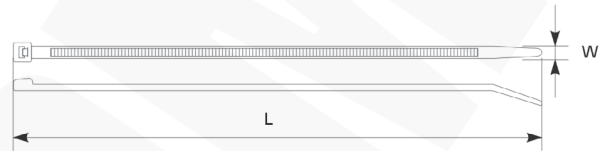

Type	Index Ergom	Tensile strength, min. [daN]	Max. bundle dia. [mm]	Tool type	L	W	Quantity in package [pcs]
TK 5/3 BK (100 PCS)	E01TK-01020100101	8	12,0	MK III A, MK III PR	60	2,4	100
TK 6/3 BK (100 PCS)	E01TK-01020100201	8	14,0	MK III A, MK III PR	80	2,5	100
TK 9/3 BK (100 PCS)	E01TK-01020100301	8	20,5	MK III A, MK III PR	100	2,5	100
TK 12/3 BK (100 PCS)	E01TK-01020100401	8	27,0	MK III A, MK III PR	120	2,5	100
TK 16/3 BK (100 PCS)	E01TK-01020100501	8	39,8	MK III A, MK III PR	160	2,5	100
TK 20/3 BK (100 PCS)	E01TK-01020100601	8	52,5	MK III A, MK III PR	200	2,5	100
TK 14/3,6 BK (100 PCS)	E01TK-01020100701	18	33,0	MK III A, MK III B, MK III C, MK III PR	140	3,6	100
TK 20/3,6 BK (100 PCS)	E01TK-01020100801	18	46,0	MK III A, MK III B, MK III C, MK III PR	200	3,6	100
TK 25/3,6 BK (100 PCS)	E01TK-01020100901	18	68,0	MK III A, MK III B, MK III C, MK III PR	250	3,6	100
TK 30/3,6 BK (100 PCS)	E01TK-01020101001	18	84,0	MK III A, MK III B, MK III C, MK III PR	300	3,6	100
TK 40/3,6 BK (100 PCS)	E01TK-01020101101	18	106,0	MK III A, MK III B, MK III C, MK III PR	370	3,6	100
TK 12/5 BK (100 PCS)	E01TK-01020101201	22	23,8	MK III A, MK III B, MK III C, MK III PR	120	4,6	100
TK 16/5 BK (100 PCS)	E01TK-01020101301	22	36,6	MK III A, MK III B, MK III C, MK III PR	160	4,6	100
TK 18/5 BK (100 PCS)	E01TK-01020101401	22	43,0	MK III A, MK III B, MK III C, MK III PR	180	4,6	100
TK 20/5 BK (100 PCS)	E01TK-01020101501	22	49,5	MK III A, MK III B, MK III C, MK III PR	200	4,8	100
TK 25/5 BK (100 PCS)	E01TK-01020101601	22	65,0	MK III A, MK III B, MK III C, MK III PR	250	4,8	100
TK 30/5 BK (100 PCS)	E01TK-01020101701	22	81,0	MK III A, MK III B, MK III C, MK III PR	300	4,8	100
TK 40/5 BK (100 PCS)	E01TK-01020101801	22	103,5	MK III A, MK III B, MK III C, MK III PR	370	4,8	100
TK 43/5 BK (100 PCS)	E01TK-01020101901	22	122,5	MK III A, MK III B, MK III C, MK III PR	430	4,8	100
TK 20/8 BK (100 PCS)	E01TK-01020102001	54	50,9	MK III B, MK III C	200	7,6	100
TK 30/8 BK (100 PCS)	E01TK-01020102101	54	82,8	MK III B, MK III C	300	7,6	100
TK 40/8 BK (100 PCS)	E01TK-01020102201	54	103,5	MK III B, MK III C	365	7,6	100
TK 45/8 BK (100 PCS)	E01TK-01020102301	54	130,5	MK III B, MK III C	450	7,6	100
TK 50/8 BK (100 PCS)	E01TK-01020102401	54	162,5	MK III B, MK III C	550	7,6	100
TK 70/8 BK (100 PCS)	E01TK-01020102501	54	226,0	MK III B, MK III C	750	7,6	100
TK 60/9 BK (100 PCS)	E01TK-01020102601	77	181,5	MK III B, MK III C	610	8,8	100
TK 70/9 BK (100 PCS)	E01TK-01020102701	77	195,0	MK III B, MK III C	710	8,8	100
TK 80/9 BK (100 PCS)	E01TK-01020102801	77	229,5	MK III B, MK III C	760	8,8	100

Type	Index Ergom	Tensile strength, min. [daN]	Max. bundle dia. [mm]	Tool type	L	W	Quantity in package [pcs]
<b>TK 110/9 BK (100 PCS)</b>	E01TK-01020102901	77	340,0	MK III B, MK III C	1168	8,8	100
<b>TK 20/13 BK (50 PCS)</b>	E01TK-01020103001	110	57,0	MK III C	230	12,4	50
<b>TK 50/13 BK (50 PCS)</b>	E01TK-01020103101	110	136,0	MK III C	480	12,4	50
<b>TK 70/13 BK (50 PCS)</b>	E01TK-01020103201	110	200,0	MK III C	730	12,6	50
<b>TK 100/13 BK (50 PCS)</b>	E01TK-01020103301	110	315,0	MK III C	1000	12,4	50