

Insulated receptacles, GI...PCV

FEATURES & BENEFITS

- socket with PVC insulating sleeve, with long Cu sleeve inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyvinyl chloride (PCV)


Material brass

Covering tin-plated

Operating temperature [°C] -5 ÷ +60

DIMENSIONS

L_2 7,0

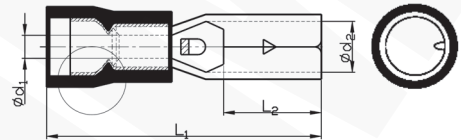

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	L_1	d_1	d_2	Weight [kg]
GI 1/4 PCV (100 PCS)	E10KN-03030100901	0,75+1	red	22,5	1,8	3,9	0,1
GI 2,5/4 PCV (100 PCS)	E10KN-03030101001	1,5+2,5	blue	22,5	2,4	3,9	0,14
GI 2,5/5 PCV (100 PCS)	E10KN-03030101101					4,9	0,15
GI 6/5 PCV (100 PCS)	E10KN-03030101201	4+6	yellow	24,5	3,5	4,9	0,18