




Insulated spade terminals in heat-shrink insulation, KWIT type

FEATURES & BENEFITS

-  spade terminal Cu, with heat-shrink insulating sleeve with adhesive, marked with screw size and cable cross-section
-  heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk
-  sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA


Insulation	high-density PE heat-shrink sleeve
Material	Cu
Covering	tin-plated
Operating temperature [°C]	-55 ÷ +105
Shrink temperature [°C]	≥ 180

CERTIFICATES & STANDARDS

Design	copper part of terminals acc. to DIN 46234 sizes
--------	--

NOTE!

Other designs on request.

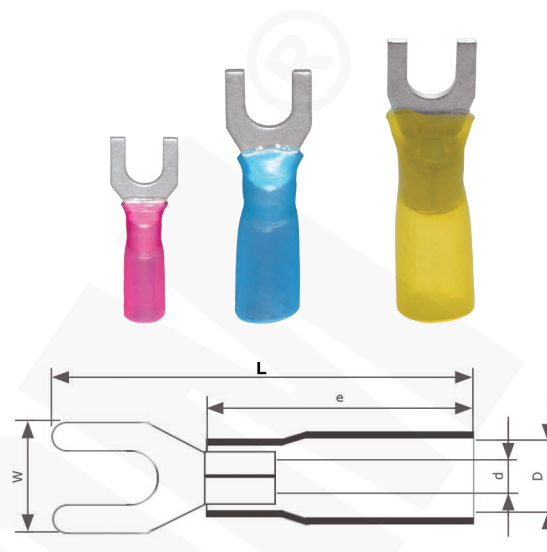

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Screw hole	L	d	D	e	W	Weight [kg]
KWIT 1/4 (100 PCS)	E09KO-02070300201	0,5+1	red	M4	30	1,6	4,8	21	8,2	0,07
KWIT 1/5 (100 PCS)	E09KO-02070300301			M5						0,09
KWIT 2,5/4 (100 PCS)	E09KO-02070300401	1,5+2,5	blue	M4	30	2,2	5,8	21	9	0,08
KWIT 2,5/5 (100 PCS)	E09KO-02070300501			M5						0,1
KWIT 6/4 (100 PCS)	E09KO-02070300601	4+6	yellow	M4	34	3,4	6,8	25	9,2	0,15
KWIT 6/5 (100 PCS)	E09KO-02070300701			M5						0,17