

“Butt splice” connectors in heat-shrink insulation, KLIT type

FEATURES & BENEFITS

- connector Cu, with heat-shrink insulating sleeve, to make “butt splice” cable connections
- heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation heat-shrink sleeve

Material Cu


Covering tin-plated

Operating temperature [°C] -55 ÷ +125

Shrink temperature [°C] +60 ÷ +100

DIMENSIONS

s_2 0,6

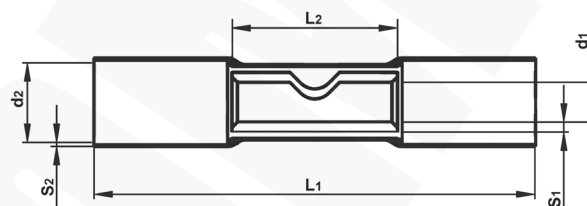

EAC

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	L ₁	L ₂	d ₁	d ₂	s ₁	Weight [kg]
KLIT 0,5 (100 PCS)	E09KO-02070100051	0,2+0,5	transparent	28	12	1,2	3,2	0,4	0,04
KLIT 1 (100 PCS)	E09KO-02070100101	0,75+1,0	red	35	15	1,7	4,8	0,8	0,11
KLIT 2,5 (100 PCS)	E09KO-02070100201	1,5+2,5	blue	35	15	2,4	5,8	0,8	0,14
KLIT 6 (100 PCS)	E09KO-02070100301	4+6	yellow	41	15	3,6	6,8	1,0	0,23