

Insulated “butt splice” connectors, KLI...PC type

FEATURES & BENEFITS

- ☒ connector Cu, with polycarbonate insulation, to make “butt splice” cable connections
- ☒ to operate in wider temperature ranges than terminals with polyamide insulation
- ☒ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- ☒ sleeve colours facilitate cross-section identification

LOGISTIC DATA


Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	polycarbonate
Material	Cu
Covering	tin-plated
Operating temperature [°C]	-50 ÷ +120

DIMENSIONS

L_2	15
-------	----

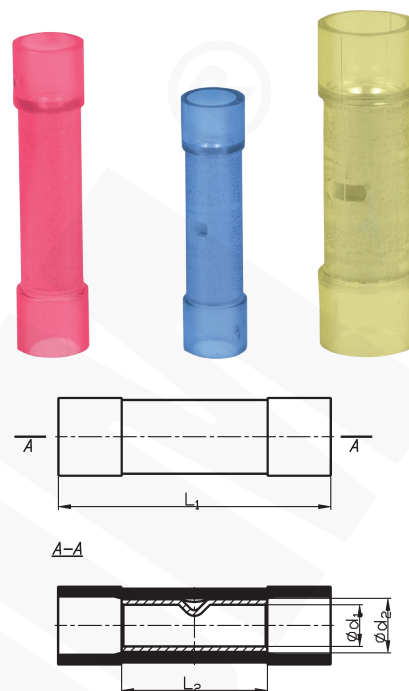

Type	Index Ergom	Cross-section [mm²]	Insulation colour	L_1	d_1	d_2	Weight [kg]
KLI 1 PC (100 PCS)	E09KO-02060200101	0,75÷1,0	red	25	1,7	4,0	0,11
KLI 2,5 PC (100 PCS)	E09KO-02060200201	1,5÷2,5	blue	25	2,3	4,5	0,14
KLI 6 PC (100 PCS)	E09KO-02060200301	4÷6	yellow	27	3,4	6,3	0,23