

Fully insulated female push-on connectors in heat-shrink insulation, NCIT type

FEATURES & BENEFITS



female push-on connector with long heat-shrink insulating sleeve with adhesive, with long Cu sleeve inside, for double crimping



heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk



sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation heat-shrink sleeve

Material brass

Covering tin-plated


Operating temperature [°C] -55 ÷ +125

Shrink temperature [°C] +60 ÷ +100

Size 6,3x0,8

DIMENSIONS

L₂ 7,9

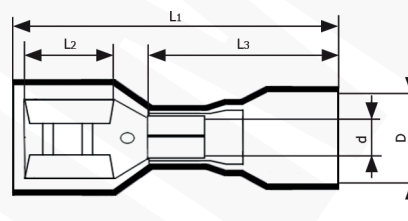

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	d	D	L ₁	L ₃	Weight [kg]
NCIT 6,3-1/0,8 (100 PCS)	E09KO-02070600201	1	red	1,7	6,2	30	21	0,07
NCIT 6,3-2,5/0,8 (100 PCS)	E09KO-02070600301	2,5	blue	2,3	6,2	30	21	0,08
NCIT 6,3-6/0,8 (100 PCS)	E09KO-02070600401	6	yellow	3,4	6,8	32	25	0,1