

Insulated female push-on connectors in heat-shrink insulation, NIT type

FEATURES & BENEFITS

- female push-on connector with heat-shrink insulating sleeve with adhesive, with long Cu sleeve inside, for double crimping
- heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA


Quantity in package [pcs] 100

MECHANICAL DATA

Insulation	high-density PE heat-shrink sleeve
Material	brass
Covering	tin-plated
Operating temperature [°C]	-55 ÷ +105
Shrink temperature [°C]	≥ 180
Size	6,3x0,8

DIMENSIONS

L₂ 7,9

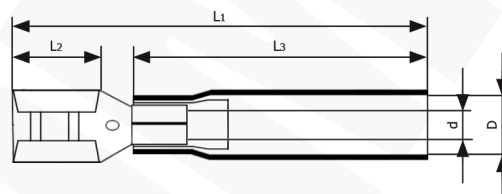

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	d	D	L ₁	L ₃	Weight [kg]
NIT 6,3-1/0,8 (100 PCS)	E09KO-02070400201	1	red	1,7	4,8	30	21	0,08
NIT 6,3-2,5/0,8 (100 PCS)	E09KO-02070400301	2,5	blue	2,3	5,8	30	21	0,09
NIT 6,3-6/0,8 (100 PCS)	E09KO-02070400401	6	yellow	3,4	6,8	32	25	0,11