

# Insulated piggyback female push-on connectors, NWI...B PCV

## FEATURES & BENEFITS



female push-on connector with male push-on connector with polyamide insulating sleeve - low-cost version for less demanding applications, without internal Cu sleeve



insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk



sleeve colours facilitate cross-section identification

## LOGISTIC DATA


Quantity in package [pcs]	100
---------------------------	-----

## MECHANICAL DATA

Insulation	polyvinyl chloride (PCV)
Material	brass
Covering	tin-plated
Operating temperature [°C]	-5 ÷ +60
Size	6,3x0,8

## DIMENSIONS

L <sub>2</sub>	8,0
C	8,2

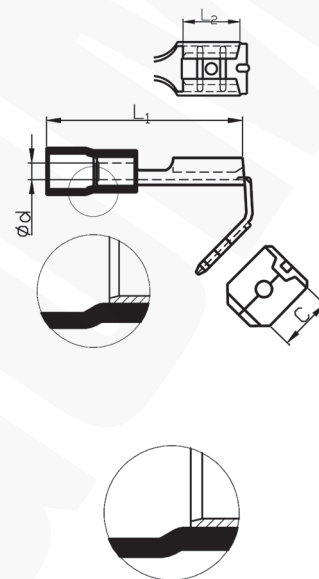

Type	Index Ergom	Cross-section [mm <sup>2</sup> ]	Insulation colour	d	L <sub>1</sub>	Weight [kg]
NWI 6,3-1/0,8 BPCV (100 PCS)	E10KN-03010600101	0,75÷1	red	1,7	22,5	0,1
NWI 6,3-2,5/0,8 BPCV (100 PCS)	E10KN-03010600201	1,5÷2,5	blue	2,3	22,5	0,11
NWI 6,3-6/0,8 BPCV (100 PCS)	E10KN-03010600301	4÷6	yellow	3,4	24,5	0,12