




Insulated bullet connectors, WI...PCV type

FEATURES & BENEFITS

-  pin with polyamide insulating sleeve, with long Cu tube inside, for double crimping
-  insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
-  sleeve colours facilitate cross-section identification

LOGISTIC DATA


Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	polyvinyl chloride (PCV).
Material	brass
Covering	tin-plated
Operating temperature [°C]	-5 ÷ +60

NOTE!

Terminals with PA and PC insulation available on request.

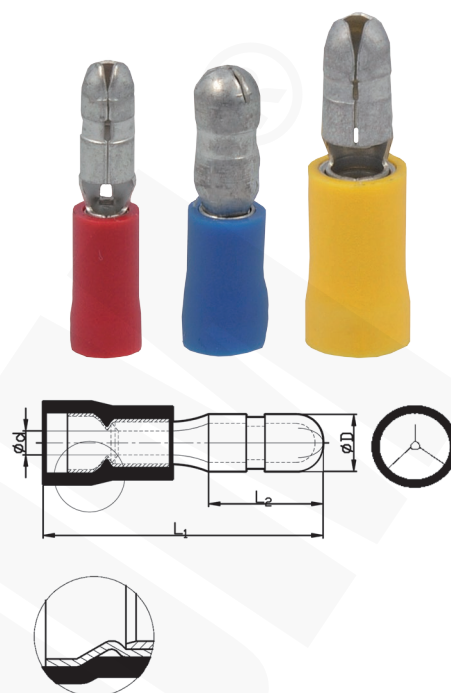

Type	Index Ergom	Cross-section [mm²]	Insulation colour	d	D	L ₁	L ₂	Weight [kg]
WI 1/4 PCV (100 PCS)	E10KN-03040100901	0,75÷1	red	1,7	4,0	22,5	9,2	0,08
WI 2,5/4 PCV (100 PCS)	E10KN-03040101001	1,5÷2,5	blue	2,3	4,0	22,5	9,2	0,09
WI 2,5/5 PCV (100 PCS)	E10KN-03040101101				5,0		9,3	0,1
WI 6/5 PCV (100 PCS)	E10KN-03040101201	4÷6	yellow	3,4	5,0	26,0	9,3	0,14